


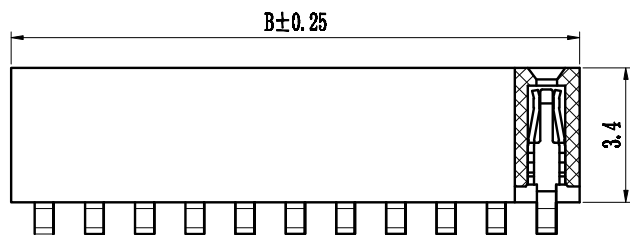



Pin数	尺寸A	尺寸B
2×2	1.27	2.94
2×3	2.54	4.21
2×4	3.81	5.48
2×5	5.08	6.75
2×6	6.35	8.02
2×7	7.62	9.29
2×8	8.89	10.56
2×9	10.16	11.83
2×10	11.43	13.10
2×11	12.70	14.37
2×12	13.97	15.64
2×13	15.24	16.91
2×14	16.51	18.18
2×15	17.78	19.45
2×16	19.05	20.72
2×17	20.32	21.99
2×18	21.59	23.26
2×19	22.86	24.53
2×20	24.13	25.80
2×21	25.40	27.07
2×22	26.67	28.34
2×23	27.94	29.61
2×24	29.21	30.88
2×25	30.48	32.15
2×26	31.75	33.42
2×27	33.02	34.69
2×28	34.29	35.96
2×29	35.56	37.23
2×30	36.83	38.50
2×31	38.10	39.77
2×32	39.37	41.04
2×33	40.64	42.31
2×34	41.91	43.58
2×35	43.18	44.85
2×36	44.45	46.12
2×37	45.72	47.39
2×38	46.99	48.66
2×39	48.26	49.93
2×40	49.53	51.20
2×41	50.80	52.47
2×42	52.07	53.74
2×43	53.34	55.01
2×44	54.61	56.28
2×45	55.88	57.55
2×46	57.15	58.82
2×47	58.42	60.09
2×48	59.69	61.36
2×49	60.96	62.63
2×50	62.23	63.90

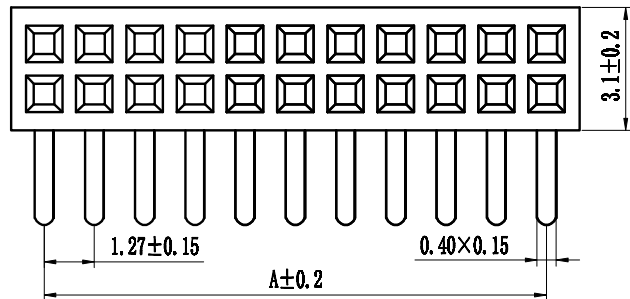

PC
2.4
3.4

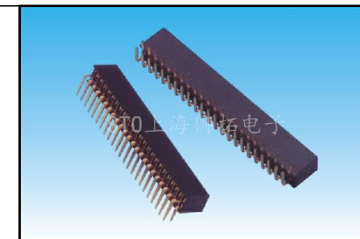

技术规范:
 额定电流 : 1AMP
 适用温度 : -40℃to+105℃
 接触电阻 : 20mΩ Max
 绝缘电阻 : 1000MΩ Min
 耐电压 : AC 500V
 绝缘材料 : Polyester (UL94V-0)
 Standard:PA-6T
 端子材质 : Bronze
 电镀规范 : Au or Sn Over 50u" Ni

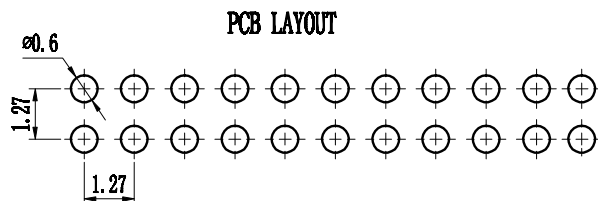

F	a	10	1	2	5p	a	a	s	D	0
序号系列	间距	高度	双型	单排	PIN数	电镀	材质	角度	端子	备注
a-0.8mm			1-单型	1-单排	1'40P/50P	A-1u"	A-PBT	S-180°	22.8mm间距225	0-3.0
b-1.0mm			2-双型	2-双排	2'40P/50P	B-2u"	B-PALD	B-90°	11.6mm间距116	1-3.0/1.0(双型)
c-1.27mm			3-三型	3-三排	3'40P/50P	C-6u"	C-PBGT	C-90°	12.2mm间距122	2-3.0/2.0(双型)
d-2.0mm			4-四型	4-四排	4'40P/50P	D-10u"	D-PBGT	Z-225°	60P-排母(双型)	3-2.0/1.0(双型)
e-2.5mm						E-15u"	E-LCP	T-135°	80P-排母(双型)	4-2.0/1.5(双型)
f-2.54mm						F-30u"		L-卧式SMT	60P-排母(双型)	其它另做说明
g-3.00mm						G-30u"			80P-排母(双型)	
h-3.00mm						H-半金指			注: 长型针试验设计	

TOLERANCE:	
X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	



上海狮拓电子科技有限公司

产品名称:
产品料号:

THIRD ANGLE PROJECTION

客户确认	
日期	日期
日期	日期
日期	日期

1.27mm双排母, 90°, 型高3.4mm
 Spec: 1.27mm Female Header, Dual Row Right Angle
 Positions: 2×2×2×50
 Plastics Height: 3.4mm