


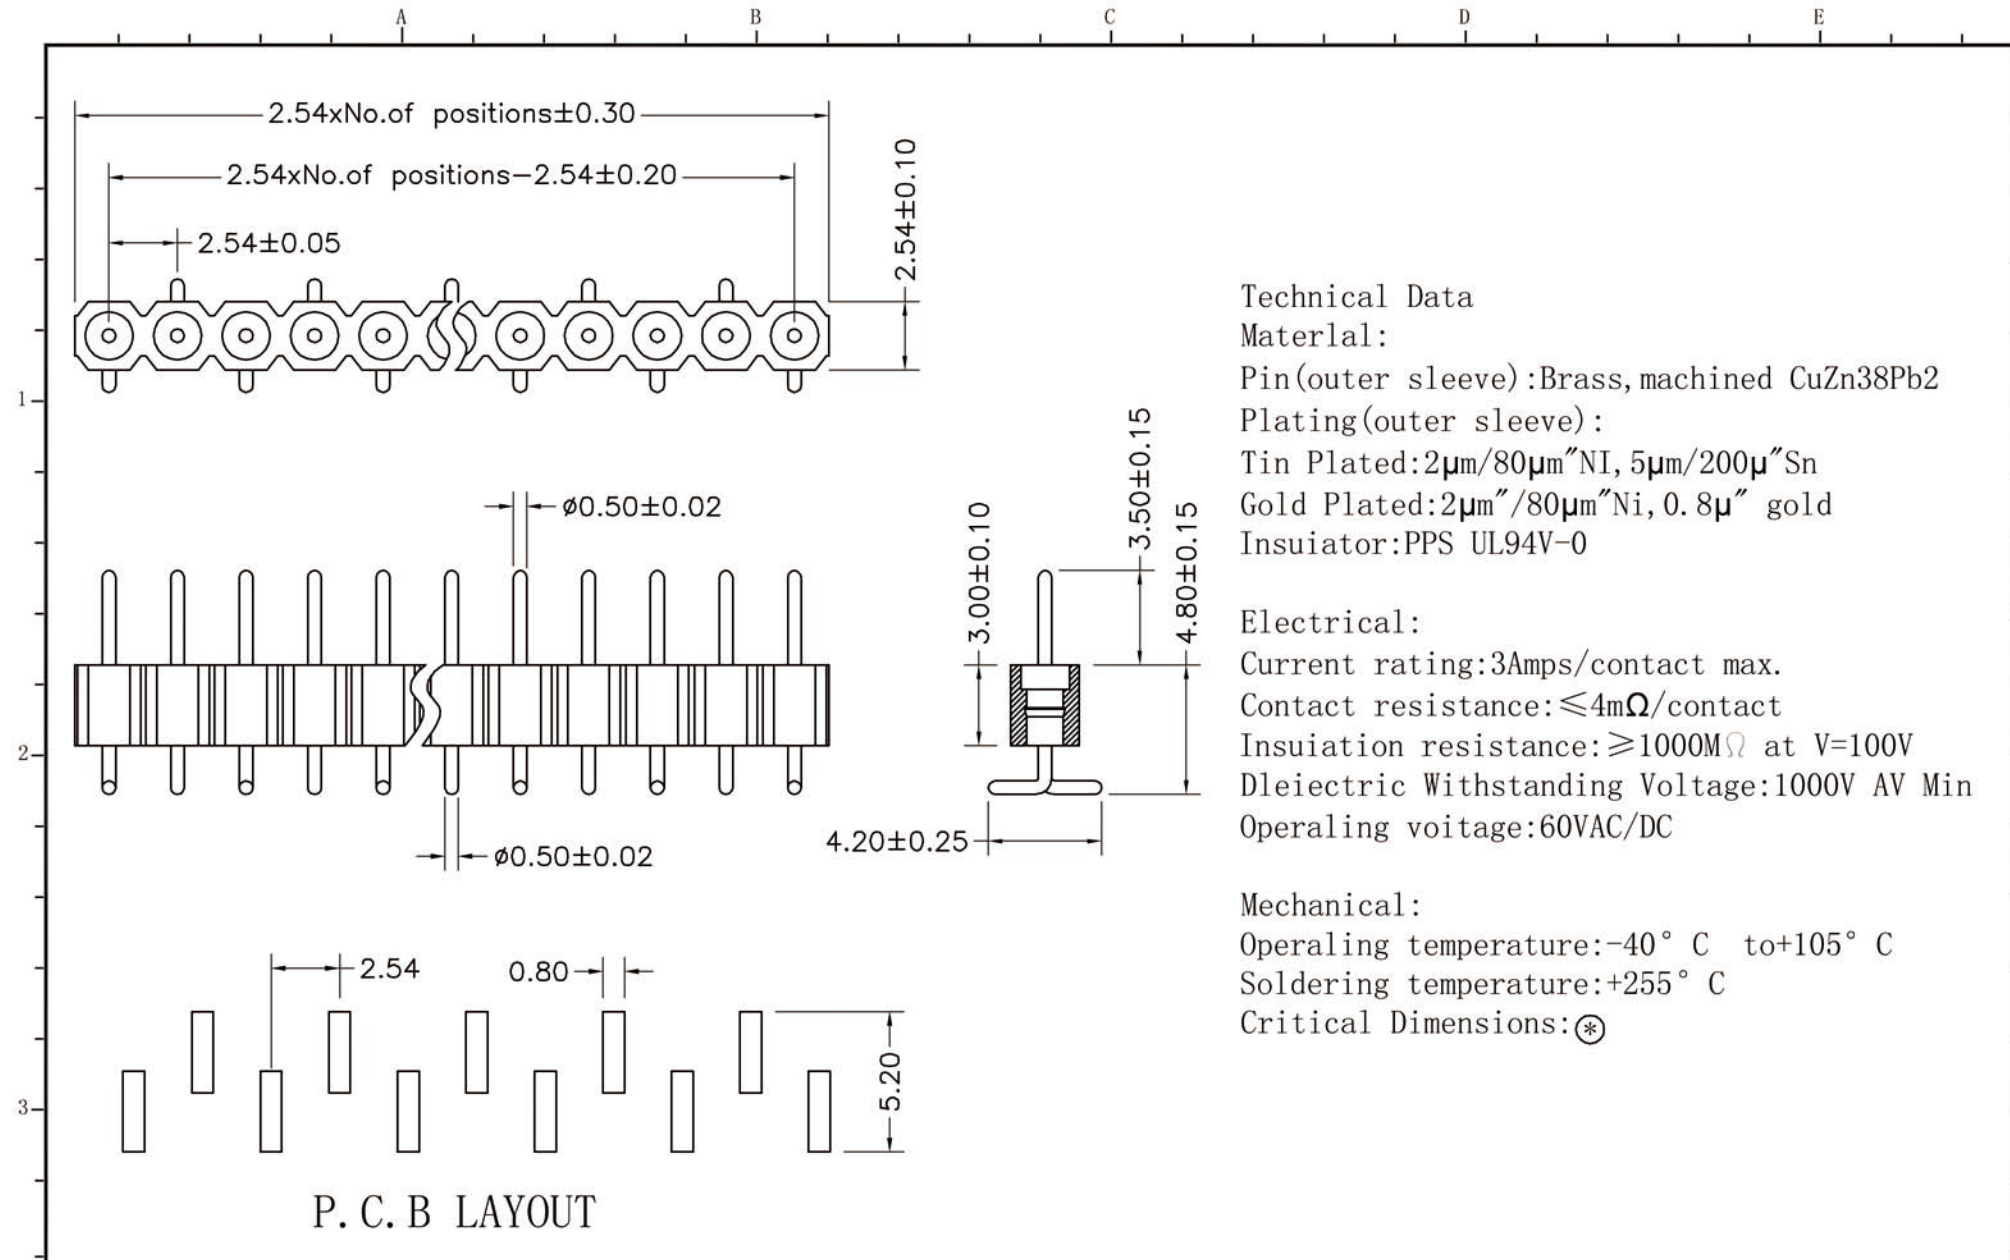

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}$ "NI, $5\mu\text{m}/200\mu$ "Sn

Gold Plated: $2\mu\text{m}$ "/80 μm "Ni, 0.8 μ " gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insuiation resistance: $\geq 1000\text{M}\Omega$ at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

Mechanical:

Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

Critical Dimensions:⊗

TOLERANCE:	STO	上海狮拓电子科技有限公司		簽名 _____	客戶確認		STOD1-SXXXX1000A-1
X. ±XXX					日期 _____	日期 _____	
.X ±0.20							
.XX ±0.10							
ANG.							
產品名稱:							
產品料號:					☐承認	日期 _____	
					☐駁回	日期 _____	