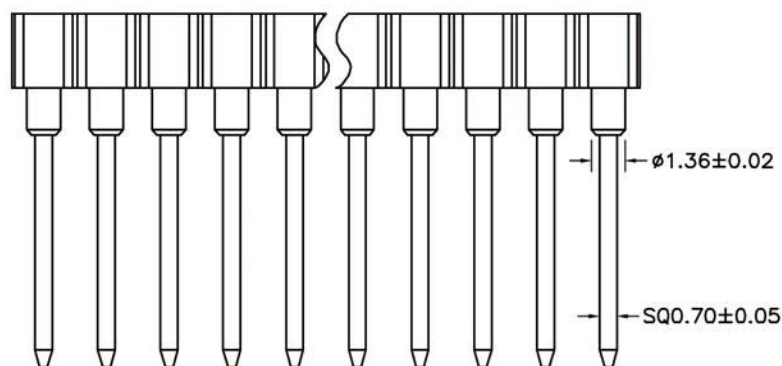
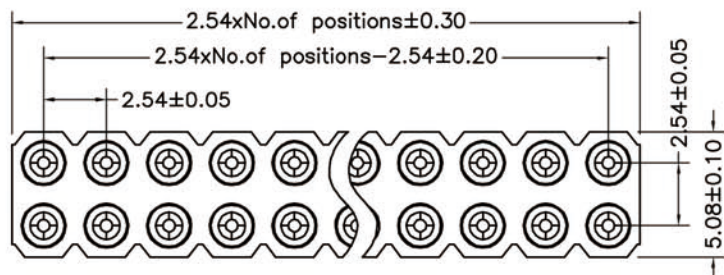


P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0.8μ" gold

Plating(Contact):2μm/80μ"NI, gold or Tin plated

Insuiator:PPS UL94V-0

ClIp(Contact 4 Flnger):Beryllium copper,heat teated

Electrlcal:

Current rating:3Amps/contact max.

Contact resistance:≤4m Ω/contact

Insuiation resistance:≥1000M Ω at V=100V

Operaing voltage:60VAC/DC

Mechanlcal:

Average Insertlon force with steel pin of Ø0.432:<270g

Average withdrawal force with steel pin of Ø0.432:>90g

Mechanical lige cycle:min 200

Operaling temperature:-40 ° C to+105 ° C

Soldering temperature:+255 ° C

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期

STOD2-DXXXXXXXXXXB