


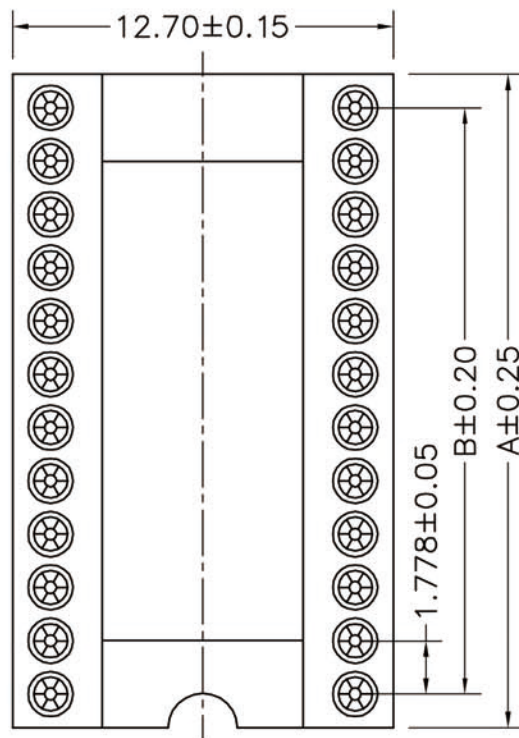

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2 μ m/80 μ m"NI, 5 μ m/200 μ "Sn

Gold Plated:2 μ m"/80 μ m"Ni, 0.8 μ " gold

Plating(Contact):2 μ m/80 μ "NI, gold or Tin plated

Insulator:PPS UL94V-0

ClIp(Contact 6 Flnger):Beryllium copper, heat teated

Electrical:

Current rating:1Amps/contact max.

Contact resistance: $\leq 4m\Omega$ /contact

Insuiation resistance: $\geq 1000M\Omega$ at V=100V

Operaing voitage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of $\varnothing 0.432$:<90g

Average withdrawal force with steel pin of $\varnothing 0.432$:>25g

Mechanical lige cycle:min 200

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Serial number	No. of Positions	PART NO	A	B
1	24	STOB4-I124XXXX0740B	21.80	19.558
2	28	STOB4-I128XXXX0740B	25.20	23.114
3	30	STOB4-I130XXXX0740B	27.00	24.892
4	32	STOB4-I132XXXX0740B	28.80	26.67
6	48	STOB4-I148XXXX0740B	43.10	40.894

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名 _____
日期 _____
審核 _____
日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____