
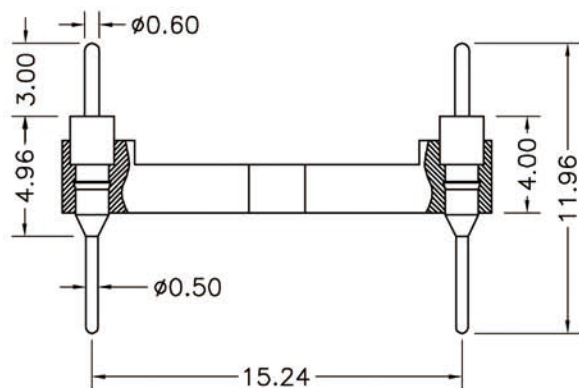


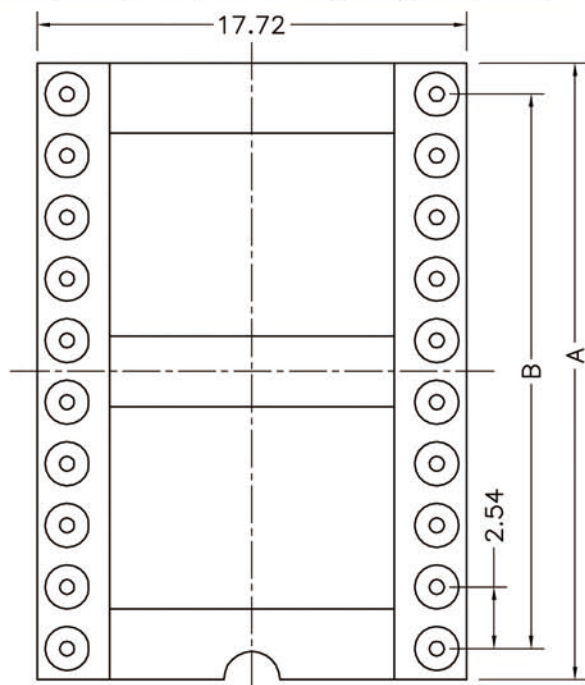

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0. 8μ" gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

Mechanical:

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Serial number	No. of Positions	PART NO	A	B
17	24	STOD5-I124XX1196A	30. 48	27. 94
18	28	STOD5-I128XX1196A	35. 56	33. 02
19	32	STOD5-I132XX1196A	40. 64	38. 1
20	36	STOD5-I136XX1196A	45. 72	43. 18
21	40	STOD5-I140XX1196A	50. 8	48. 26
22	42	STOD5-I142XX1196A	53. 34	50. 8
23	48	STOD5-I148XX1196A	60. 96	58. 42
24	50	STOD5-I150XX1196A	63. 5	60. 96
25	52	STOD5-I152XX1196A	66. 04	63. 5

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期