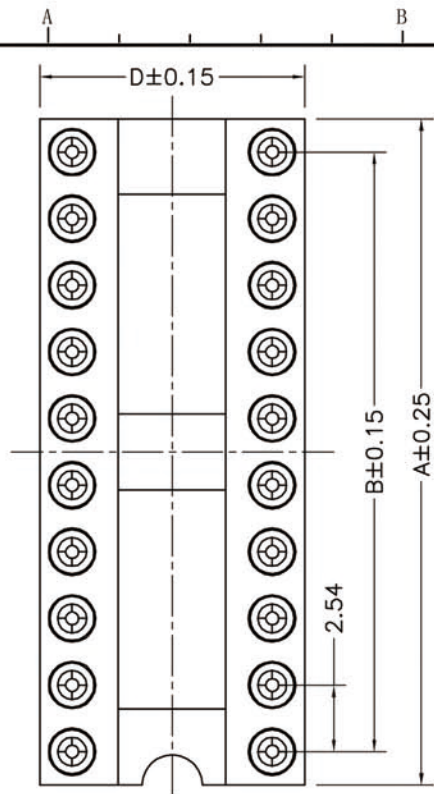


Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0.8μ" gold

Plating(Contact):2μm/80μ"NI,gold or Tin plated

Insuiator:PPS UL94V-0

Cllp(Contact 4 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Operaing voitage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of Ø0.432:<250g

Average withdrawal force with steel pin of Ø0.432:>70g

Mechanical lige cycle:min 200

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Serial number	No. of Positions	PART NO	A	B	C	D
1	6	STOD3-I106XXX0743B	7.62	5.08	7.62	10.10
2	8	STOD3-I108XXX0743B	10.16	7.62	7.62	10.10
3	10	STOD3-I110XXX0743B	12.7	10.16	7.62	10.10
4	12	STOD3-I112XXX0743B	15.24	12.7	7.62	10.10
5	14	STOD3-I114XXX0743B	17.78	15.24	7.62	10.10
6	16	STOD3-I116XXX0743B	20.32	17.78	7.62	10.10
7	18	STOD3-I118XXX0743B	22.86	20.32	7.62	10.10
8	20	STOD3-I120XXX0743B	25.4	22.86	7.62	10.10
9	22	STOD3-I122XXX0743B	27.94	25.4	7.62	10.10
10	24	STOD3-I124XXX0743B	30.48	27.94	7.62	10.10
11	28	STOD3-I128XXX0743B	35.56	33.02	7.62	10.10

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期