

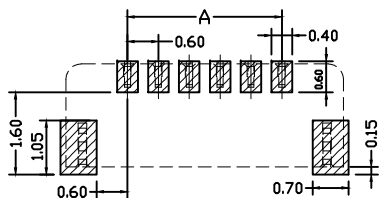



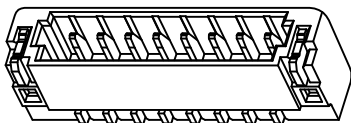


R O H S

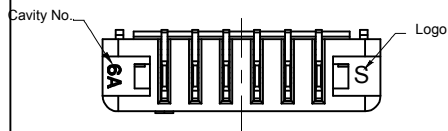

Recommended P.C.B Layout

General Tolerance±0.05

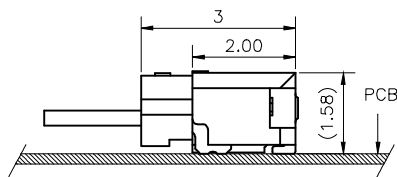

Mated Condition

### Specification

- Voltage Rating : 30V AC/DC
- Current Rating : 0.2A AC/DC
- Withstanding Voltage : 200V AC /minute
- Insulation Resistance : ≥100MΩ
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : ≤30mΩ
- After Environmental Testing: ≤40mΩ
- Suitable Wire/Cable:AWG #34 to #36,OD:0.29mm max

### Ordering Information

A0601 W R S - XX XX - XX XX XX - XX XX XX  
1 2 3 4 5 6 7 8 9 10 11 12

- 1.A0601:Series No.
- 2.Category:W-Wafer
- 3.Soldering PCB Angle:R-Right angle/90°
- 4.Soldering method:S-SMD/SMT, Surface Mount Technology
- 5.Number of rows&pins:XX
- 6.Plug the pin & Special No.:Blank-Ordinary
- 7.Material(Insulators):N0-PA66,UL94V-0;LP-LCP,UL94V-0
- 8.Color:Blank-Natural;BK-Black
- 9.Environmental protection Standard:Blank-Ordinary
- RoHS;HF-Halogen Free
- 10.Material(Pin):PB-Phosphor Bronze
- 11.Plating :SN-Bright Tin Plated;AU-Gold flash;AU3-Gold 3U
- 12.Package:Blank-Tape&Reel,SPQ:4.5K/reel preferred

| Poles | Dimensions(mm) |      | Poles | Dimensions(mm) |       |
|-------|----------------|------|-------|----------------|-------|
|       | A              | B    |       | A              | B     |
| 02    | 0.60           | 3.00 | 12    | 6.60           | 9.00  |
| 03    | 1.20           | 3.60 | 13    | 7.20           | 9.60  |
| 04    | 1.80           | 4.20 | 14    | 7.80           | 10.20 |
| 05    | 2.40           | 4.80 | 15    | 8.40           | 10.80 |
| 06    | 3.00           | 5.40 | 16    | 9.00           | 11.40 |
| 07    | 3.60           | 6.00 | 17    | 9.60           | 12.00 |
| 08    | 4.20           | 6.60 | 18    | 10.20          | 12.60 |
| 09    | 4.80           | 7.20 | 19    | 10.80          | 13.20 |
| 10    | 5.40           | 7.80 | 20    | 11.40          | 13.80 |
| 11    | 6.00           | 8.40 | 22    | 12.60          | 14.40 |

|                         |                                |                 |             |                       |                     |                           |
|-------------------------|--------------------------------|-----------------|-------------|-----------------------|---------------------|---------------------------|
| A0601WRS-XX-LPBKHF-PBAU | LCP,UL94V-0,Black Halogen Free | Phosphor Bronze | Gold flash  | Brass                 | Matte Tin plated    | A0601H-XX-LPBKHF-PBAU     |
| Part No.                | Material(Insulators)           | Material(Pin)   | Finish(Pin) | Material(Solder Tabs) | Finish(Solder Tabs) | Mates with Housing/Socket |

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.

STO

上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION

簽名

日期

審核

日期

客戶確認

☐承認 日期

☐駁回 日期