

A

B

C

D

E

F






G

H

I

J

Pin数	尺寸A	尺寸B	尺寸C
2	1.25	4.25	7.55
3	2.50	5.50	8.80
4	3.75	6.75	10.05
5	5.00	8.00	11.30
6	6.25	9.25	12.55
7	7.50	10.50	13.80
8	8.75	11.75	15.05
9	10.00	13.00	16.30
10	11.25	14.25	17.55
11	12.50	15.50	18.80
12	13.75	16.75	20.05
13	15.00	18.00	21.30
14	16.25	19.25	22.55
15	17.50	20.50	23.80
16	18.75	21.75	25.05

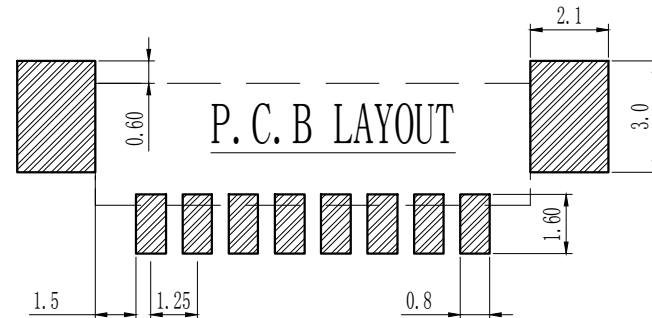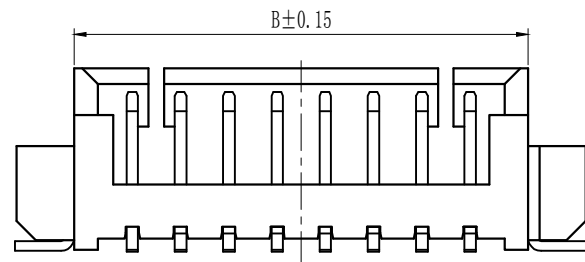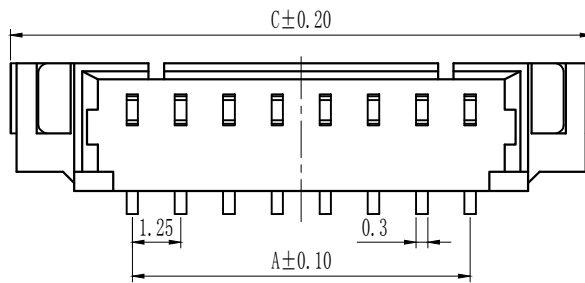

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC,DC,125V (有效值)
Voltage rating: AC,DC,125V(rms)
- ◆额定电流: 0.5A, AC, DC (AWG#28)
Current rating:0.5A, AC, DC (AWG#28)
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0
Insulator:Nylon46, UL94-V0
- ◆接触针: 磷铜
Cobtact PIN:Phosphor bronze
- ◆焊片: 磷铜
Solder tab:Phosphor bronze

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名

日期

审核

日期

客户确认

☐ 承认 日期

☐ 驳回 日期

1.25T-1-LT-NA