

A

B

C

D

E

F



G

H



I

J


Pin数	尺寸A	尺寸B
2	2.00	8.00
3	4.00	10.00
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

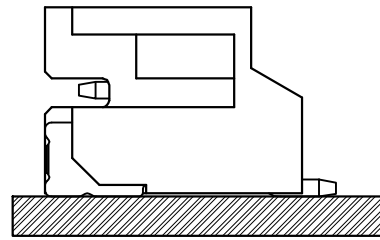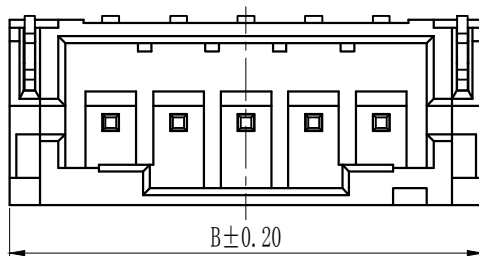

Assembly layout

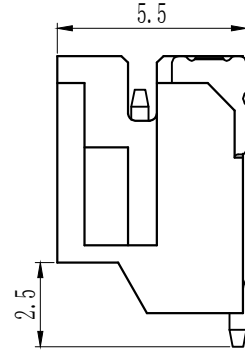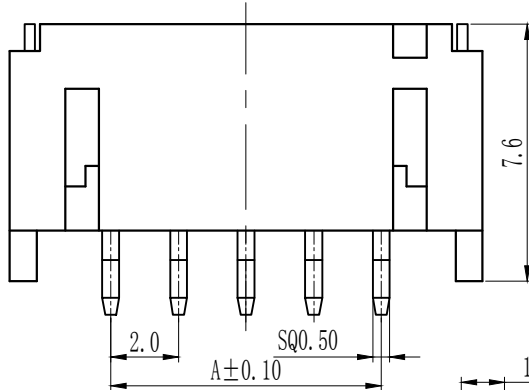

P. C. B LAYOUT

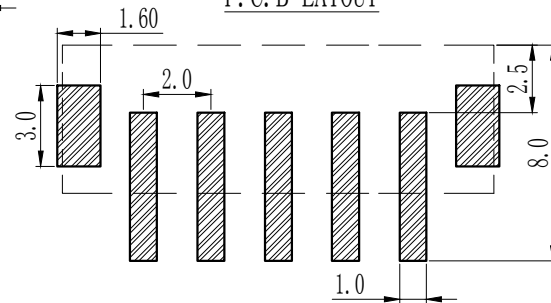

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#24-#32
Applicable Wire:AWG#24-#32
- ◆额定电压: AC,DC, 100V (有效值)
Voltage rating: AC,DC, 100V(rms)
- ◆额定电流: 2A, AC, DC (AWG#28)
Current rating:2A, AC, DC (AWG#28)
- ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤10mΩ
Contact resistance:≤10mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙9T, UL94-V0
Insulator:Nylon94-V0
- ◆接触针: 磷铜
Contact PIN:Phosphor Bronze

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐承認 日期

☐駁回 日期

PH-WT-NA